

伊 达[®]
YIDA

伊净龙系列

HOMOGENEOUS PVC FLOORING

同质透心PVC地材



Sheet





PRODUCTS APPLICATION PLACES 产品适用场所

同质透心弹性地材，具备灵活多样的设计选择，具备高度耐磨、洁净抗菌、抗污染、健康环保、易清洁保养等众多优良性能，使其广泛适用于极高人流量的商业和工业领域，包括医疗机构、养老机构、教育机构、交通场所、办公楼、商场、工厂等。Homogeneous core-penetrating elastic flooring, with flexible and diverse design choices, with high wear resistance, clean antibacterial, anti-pollution, health and environmental protection, easy to clean and maintain many excellent performance, it is widely used in high-traffic commercial and industrial fields, including medical institutions, old-age institutions, educational institutions, transportation places, office buildings, shopping malls, factories and so on.



Y822A-306 Sand yellow 沙黄



Y822A-307 Bean leaf 豆橘



Y822A-022 Cos grey 坂灰



Y822A-015 Chalk black 柯黑



Y822A-416 Puff red 芳红




Y822A-614 Mix blue 胶蓝



Y822A-119 Pod sand 芸沙



Y822A-120 Deep brown 深咖

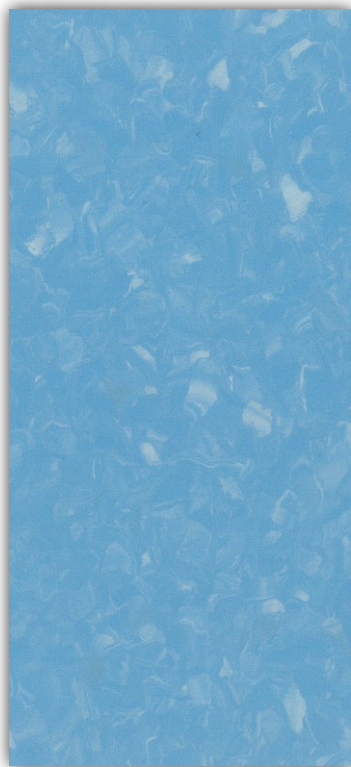

Y822A-602 Peaceful 明蓝



Y822A-601 Sea blue 海蓝



Y822A-502 Soft green 宁绿



Y822A-501 Green tea 绿茗



Y822A-101 Light coir 嫩黄



Y822A-201 Khaki 卡其



Y822A-001 Gently grey 米灰



Y822A-002 Plow rock 耘岩

样品与实物如有色差，以实物为准！

FEWER VOC,S BETTER INDOOR AIR QUALITY

更低的VOC排放，更好的室内空气质量



COMPOSITION

- 100%REACH compliant
成分100%符合REACH法规
- FREE of formaldehyd
不含甲醛
- FREE of heavy metals
不含重金属
- FREE of solvent
不含溶剂



RECYCLED CONTENT

成份环保

- 100%REACH compliant recycle content
100%符合REACH规定



RECYCLABLE

可循环

- 100% recyclable product
产品100%可回收



INDOOR AIR QUALITY

室内空气质量

- TVOC emissions 100 times lower than norm requirements(TVOC <10 $\mu\text{g}/\text{m}^3$ after 28 days)
TVOC排放低于标准100倍 (28天后TVOC排放<10 $\mu\text{g}/\text{m}^3$)
- No formaldehyde emission
不含甲醛



WELLNESS

健康

- Antibacterial activity (inhibits growth>99%)
有效抑菌(抑菌率>99%)

PUR Special maintenance


PUR protect 特殊维护处理

Compacted homogenous floorcovering

致密同质透心地板



秉承：不含 DOP,重金属、VOC含量极低。

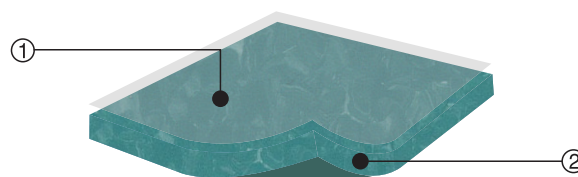

幼儿园

kindergarten



走廊通道

Corridor channel



学校

School kindergarten



多功能厅

Multi-function hall



餐厅酒廊

Restaurant Lounge



大堂

Lobby



办公楼

Office building



图书馆

Library



实验室

Laboratory



医院

Hospital

Product Specifications 产品规格

Description 规格	Standard 标准	Unit 单位	Result 结果
Type of flooring 材料类型	EN649		Homogeneous sheet 同质透心卷材
Total Thickness 总厚度	EN428	mm	2.0
Width 卷宽	EN426	m	2
Length Sheet 卷长	EN426	m	20
Classificayion 类别			
Fire rating 防火等级	GB 8624-2012		GB 8624 BI (Bfl-s1)
Toxic testing 国家建材测试	GB 18586-2001		Good 有害物质含量合格
Electrical resistance 抗电阻性	EN1081		> 10 ⁹⁻¹⁰
Slip resistance dry 防干滑性	EN13893		≥0.3
Slip resistance wet 防湿滑性	EN 51 130		R9
Performances 性能			
Abrasion group 耐磨等级	EN660-2		P-T
Castor wheel test 轮压测试	EN425		Suitable 合格
Color fastness 颜色稳定性	EN 20 105-B02		6
Chemical products resistance 抗化学性	EN423		Good 好
Dimensional stability 尺寸稳定性	EN434	%	≤0. 40
Flexibility 柔韧性	EN435		Excellent 优异
Hygiene treatment 清洁性能	MRSA		Very good 良好
Impact sound reduction 行走回声	ENISO717/2		Approx.+4dB
Indentation 压痕性	EN433	mm	≈0.05
Residual indentation 残余凹陷度	EN433	mm	Approx.0.04约等于0.04
Surface treatment 表面处理			PUR



DQP检测值
未检出



儿童玩具标准
重金属未检出



甲醛释放量
检测值为0



欧盟高危致癌物
未检出



释放量28天检测
欧标1/200

样品与实物如有色差，以实物为准！